

Projects

<u>Lichtefeld Inc</u> > <u>Projects</u> > Kyana Packaging / ASR Services Re-Roof

Kyana Packaging / ASR Services Re-Roof

Re-Roofs / MR-24 Metal



Square Feet

110,000 s.f. metal over metal re-roof



Project Location

2501 Ampere Drive Louisville, KY 40299



Construction Dates

June 2015 thru September 2015



End User

Packaging, supply, and services company












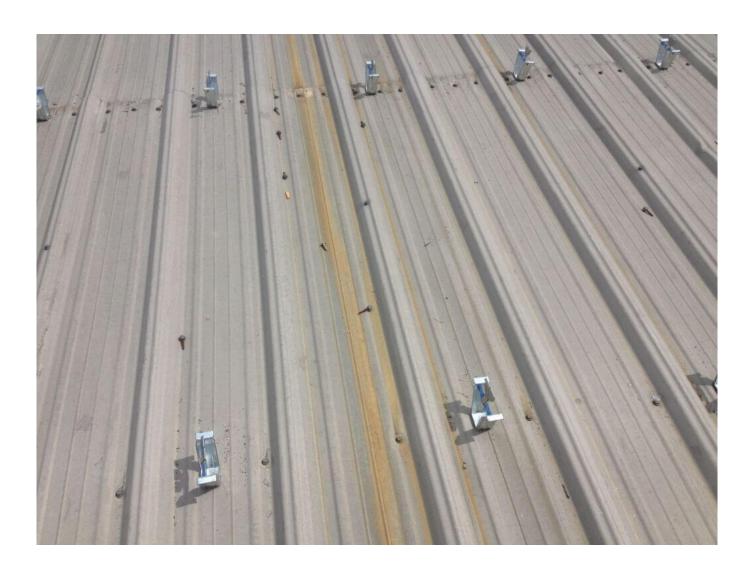





















Property Details

This is a state-of-the-art 110,000 s.f. metal over metal re-roof project of an existing screw-down roof system. The current CECO building/screw-down roof system is now being covered with a Butler Manufacturing state-of-the-art MR-24 standing machine seamed roof system with a 25-year warranty. The new roof adds insulation to the entire 110,000 s.f. building in an effort to improve utility costs, weather tightness, and overall longevity of the building. Insulated skylights will allow for natural lighting to improve on utility costs as well.

This project is designed and built by Lichtefeld, Inc. coupled with Butler Manufacturing.